

AD-A044 764

COLD REGIONS RESEARCH AND ENGINEERING LAB HANOVER N H F/G 13/2  
ON THE STABILITY OF DAM SLOPES WITH WINTER FILLS OF INDIVIDUAL --ETC(U).  
SEP 77 K BRUMMER

UNCLASSIFIED

CRREL-TL-641

NL

| OF |  
ADA044764



END  
DATE  
FILMED  
10-77  
DDC

TL 641



Draft Translation 641

September 1977

12

11

12 15 p.


ON THE STABILITY OF DAM SLOPES WITH  
WINTER FILLS OF INDIVIDUAL DAM ZONES

(Zur Standsicherheit von Staudammböschungen  
mit Winterschüttung Einzelner Dammszonen).

Karl-Heinz K.H. Brummer

CRREL-TL-641

ADA 044 764



AD No. \_\_\_\_\_  
DDC FILE COPY

CORPS OF ENGINEERS, U.S. ARMY  
COLD REGIONS RESEARCH AND ENGINEERING LABORATORY  
HANOVER, NEW HAMPSHIRE

Approved for public release; distribution unlimited.

037 100

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Draft Translation 641	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ON THE STABILITY OF DAM SLOPES WITH WINTER FILLS OF INDIVIDUAL DAM ZONES		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) K.H. Brummer		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Cold Regions Research and Engineering Laboratory Hanover, New Hampshire		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) DAMS ON PERMAFROST                      SLOPE STABILITY WINTER CONSTRUCTION		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) German Standard TGL 21 239, Sheet 3 (1), valid in the GDR, permits dam construction materials to be installed under frost only when the prescribed tightness and adequate bonding in the construction joints of the fill can be achieved. To solve this problem of winter construction with natural earth packing materials, extensive studies (2) were performed in the VEB special construction combine on hydroconstruction in Weimar. In this connection, the VEB water economy planning in Halle received the commission of demonstrating		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

the stability of dam slopes, with the objective of understanding the stability-reducing effect, under winter conditions, of filled dam zones consisting of cohesive earth materials. The effects of frost reduce the shear strength in the construction joints of the fill layers of the cohesive earth material. Advance calculation of this effect on the stability of dam slopes is a necessary basis for deciding the implementability of winter fills and the associated economic considerations. The greater permeability of construction joints subject to frost is another important effect. These must be evaluated according to the method described in (3). In this report, the effect of planned winter fills on the stability of slopes on two dam cross sections with different construction shall be explained. In this report, the effect of planned winter fills on the stability of slopes on dam cross sections with different construction shall be explained.

ACCESS	DATE	TIME
NO.		
BY		
SECURITY INDEX		
SPECIAL		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

DRAFT TRANSLATION 641

ENGLISH TITLE: ON THE STABILITY OF DAM SLOPES WITH WINTER FILLS OF  
INDIVIDUAL DAM ZONES

FOREIGN TITLE: ZUR STANDSICHERHEIT VON STAUDAMMBOSCHUNGEN MIT WINTERSCHUTTUNG  
EINZELNER DAMMZONEN

AUTHOR: K.H. Brummer

SOURCE: Wasserwirtschaft und Wassertechnik, vol. 25, 1975, p.388-391.

Translated by Rosetta Stone, Nashua, N.H. for U.S. Army Cold Regions Research  
and Engineering Laboratory, 1977, 11p.

NOTICE

The contents of this publication have been translated as presented in the original text. No attempt has been made to verify the accuracy of any statement contained herein. This translation is published with a minimum of copy editing and graphics preparation in order to expedite the dissemination of information. Requests for additional copies of this document should be addressed to the Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314.



# On the Stability of Dam Slopes with Winter Fills of Individual Dam Zones

Dipl. Eng. KARL-HEINZ BRUMMER, KDT, Dresden

Contribution from the VEB Water Economy Planning

Standard TGL 21 239, Sheet 3 (1), valid in the GDR, permits dam construction materials to be installed under frost only when the prescribed tightness and adequate bonding in the construction joints of the fill can be achieved. To solve this problem of winter construction with natural earth packing materials, extensive studies (2) were performed in the VEB special construction combine on hydroconstruction in Weimar. In this connection, the VEB water economy planning in Halle received the commission of demonstrating the stability of dam slopes, with the objective of understanding the stability-reducing effect, under winter conditions, of filled dam zones consisting of cohesive earth materials. The effects of frost reduce the shear strength in the construction joints of the fill layers of the cohesive earth material. Advance calculation of this effect on the stability of dam slopes is a necessary basis for deciding the implementability of winter fills and the associated economic considerations. The greater permeability of construction joints subject to frost is another important effect. These must be evaluated according to the method described in (3).

In this report, the effect of planned winter fills on the stability of slopes on two dam cross sections with different construction shall be explained.

## Example 1: Earth-Stone Fill Dam

For the dam shown in cross section in Figure 1, it was planned, while construction was in progress, to fill the clay packing zone together with its bordering transition zones under winter conditions. The construction operators

here anticipated that the maximum height of the winter fill zone would be 2.0 m, and that this fill zone could lie at a dam height in the range from 17.60 m to 27.60 m.

#### Characteristic Data for Earth Materials

Results from laboratory studies on frozen clay samples were available for the calculation. But their extent was small and their information was inadequate. The only fact that could be obtained from these results was that the pore water pressure hardly differed from unfrozen specimens, but that the measured shear strength was reduced (4). In order not to have to rely at the very beginning still further on laboratory capacities which are available only to a limited extent, shear strength parameters were assumed in order to check whether significantly reduced values leave intact the required stability level of the slope on the water side.

The effective friction angles  $\psi'$  of the fill material of the individual dam zones are given in Table 1. An effective cohesion  $c'$  was assumed for the clay. The values  $\psi'$  for the shear parameter combinations (1) and (2) emerged from the assumed relative displacements and their mutual compatibility from one dam zone to another, according to the recommendations in (5). Because of the variability of the devices used to determine the shear strength of individual dam construction materials (large and small box shear device, triple axis device), no direct relationships exist between the specimen displacements. Accordingly, specification of the shear strength of different dam zones must in this case be evaluated only as an approximate solution. In combination (3), the value  $\min \psi'$  for clay corresponds to a specimen displacement  $\Delta h_0 / \Delta h = 20\%$  of the  $UU_p$  experiment in the triple axis device.

For clay slate and greenstone slate, the specified values represent the maximum effective friction angle  $\max \psi'$ . The calculation takes into account an assumed reduction in shear strength, in consequence of the effect of frost, by decreasing the friction angle  $\psi'$  for clay by 30% and by 50% (see Table 2). The magnitude of the pore water pressure remained unchanged with respect to existing earth-static calculations.

Table 1: Effective Friction Angle for the Fill Material of the Dam Zones

Kombination 1	Wirksamer Reibungswinkel $\phi'$ 2		
	Lehm 3	Tonschiefer 4	Diabas 5
(1)	39,3°	29,6°	32,5°
(2)	38,3°	36,4°	37,0°
(3)	34,9°	37,0°	42,0°

1. Combination; 2. Effective friction angle  $\phi'$ ; 3. Clay;  
4. Clay Slate; 5. Greenstone slate

Table 2: Reduced Friction Angle for Clay (Example 1)

Kombination	0,7 $\phi'$	0,5 $\phi'$
(1)	27,3°	19,6°
(2)	26,8°	19,1°
(3)	24,4°	17,5°

#### Calculations Performed and their Results

The demonstration of stability for the case of winter fill was performed only for the load case "construction status" and the shear parameter combinations (1) and (2). Under these conditions, the smallest reliabilities had already resulted in existing calculations for fill operation under normal weather conditions.



#### Friction Circle Method after BISHOP

The friction circles were studied according to this method by means of an EDP program (6). A selection of them has been entered into Figure 1. Corresponding to the inclination of the slip lines for radii  $R_1$  through  $R_3$  in the investigated range of dam heights, the winter fill zone lying at the various heights was associated with the existing lamellar division. Depending on the position of the friction circle, the reduced shear parameters for layers 10 through 13 had to be introduced into the present calculation. Small geometric deviations are here of subordinate significance. The results are shown numerically in Table 3 and graphically in Figure 2. The lowest safety level  $\min n$  for the combination (3) for unreduced shear strength has here also been entered into Figure 2. Calculations showed that the required stability  $n \geq 1.3$  continues to be met if the decrease in shear strength is not more than 50%. From the results (4 other friction circles were investigated), the following trend in part appears: As the position of the winter fill zone in the investigated range of dam height becomes lower, the stability declines to a greater extent than for a more elevated position. These deviations, however, are only small and without practical significance for construction.

#### Slip Wedge Method (Block Method)

For the calculation performed in accord with (7), the investigated slip lines are given in Figure 3. The reduced shear parameters were associated with the horizontal and inclined section of the slip line running in clay. The results of the shear parameter combination (3), which up to now has most often been used in practice, as well as for combination (2) are cited in Table 4. The stability for combination (1) is less than 1.3, since here the time-dependent decrease of the pore water pressure has not been used.

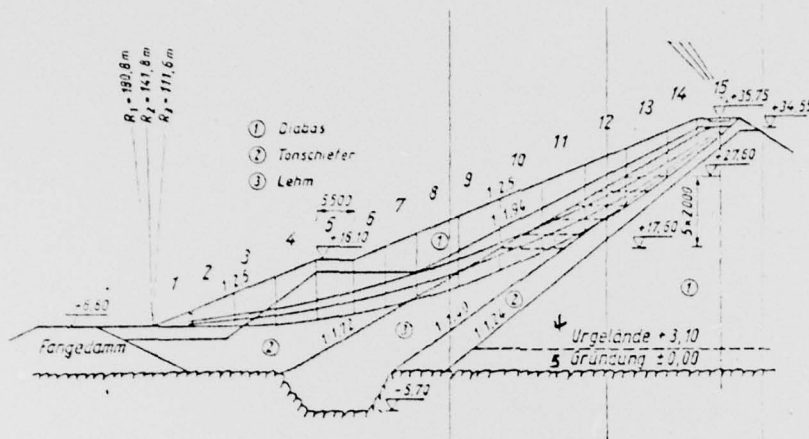


Figure 1: Dam Cross Section and Calculated Friction Circles for Example 1

- |                     |                    |
|---------------------|--------------------|
| 1. Greenstone slate | 4. Primary terrain |
| 2. Clay slate       | 5. Foundation      |
| 3. Clay             |                    |

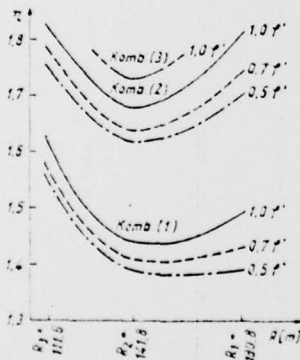


Figure 2: Course of the Stability Level  $\min \eta$  for 3 Friction Circles  
(Figure 1) after Winter Fill of a Portion of the Clay Packing

Kenn- zahl 1	Radius 2	Lamelle 3	Kombination (1) 4			Kombination (2) 5		
			1,0 $\varphi'$	0,7 $\varphi'$	0,5 $\varphi'$	1,0 $\varphi'$	0,7 $\varphi'$	0,5 $\varphi'$
00 01		—	1,49					
01 01		—				1,81		
02 01		11	1,43					
03 01		11				1,74		
04 01	$R_1 = 189,8$	12	1,46					
05 01		12				1,78		
06 01		11		1,59				
07 01		11					1,70	
08 01		12		1,45				
09 01		12					1,77	
00 02		—	1,44					
01 02		—				1,68		
02 02		10	1,41					
03 02		10				1,65		
04 02		11	1,41					
05 02		11				1,65		
06 02		12	1,41					
07 02		12				1,64		
08 02	$R_2 = 141,8$	13	1,41					
09 02		13				1,65		
10 02		10		1,40				
11 02		10				1,63		
12 02		11		1,40				
13 02		11				1,63		
14 02		12		1,39				
15 02		12				1,62		
16 02		13		1,39				
17 02		13				1,63		
00 03		—	1,62					
01 03		—				1,82		
02 03	$R_3 = 111,6$	14		1,57				
03 03		14				1,78		
04 03		14		1,55				
05 03		14					1,75	

Table 3: Stability Level  $\eta$  for 3 Friction Circles with Reduced Friction Angle for Clay

1. Identifying Number
2. Radius
3. Layer
4. Combination 1
5. Combination 2

Figure 5: Slip lines in the investigation after the slip-wedge method in Example 2

1. Slip line

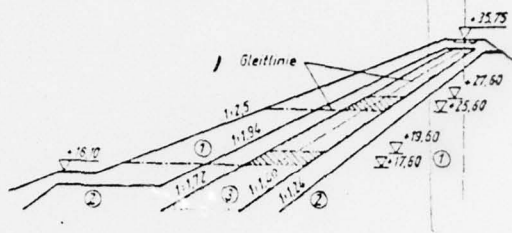


Figure 4: Dam Cross Section and  
calculated friction circles in  
Example 2

1. Winter fill 1
2. Winter fill 2


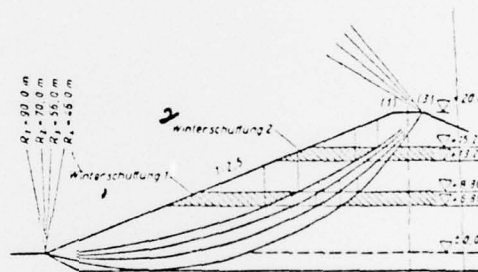


Figure 5: Course of the stability level  $\eta$  for 4 friction circles (Figure 4) after winter fill in zones 1 and 2

1. 10 cm frozen layer thickness
2. 40 cm frozen layer thickness
3. Variant 0
4. Variant 1
5. Variant 4

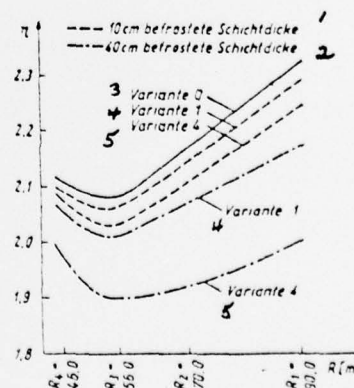

#### Example 2: Homogeneous Earth Dam

The dam shown in Figure 4 consists of cohesive earth material with fill layers of 0.4 m. For this dam, the stabilities of the slope were calculated with winter fill zones 1 and 2. Furthermore, the assumption was made that the entire dam was filled under winter conditions. The pore water pressure in the calculated load case "construction status" is assumed constant at 30% of the superposed weight.

#### Data for the Earth Material

The natural shear strengths as well as the ones reduced as a consequence of frost effects are given in Table 5. It has here been taken into account that the value  $\varphi'$  is reduced less as a result of frost than the cohesion  $c'$ . From the reduced shear strengths cited in Table 5 (Variant 1 through 4) and from the natural values for Variant 0, the weighted average over the entire layer thickness of 40 cm was formed for a frozen layer thickness of 5 cm and 10 cm.

#### Friction Circle Method according to BISHOP (6)

The calculations and results are selectively shown in Figures 4 and 5. The lamellar division was constructed differently, depending on the position of the winter fill zones with respect to the individual friction circles. The above-mentioned figures make it possible to compare the stabilities in the case of winter fill periods 1 and 2 with those in the case of normal fill technology (Variant 0). With 5 cm frozen layer thickness, the stability for Variant 1 min amounts to 2.07, and for Variant 4 min amounts to 2.06. Accordingly, in this case, the only essential factor for the stability is whether a frozen layer of 5 cm or 10 cm thickness is built in with each fill layer. For further comparison, the results of a complete winter fill of the dam ( $R_1$  through  $R_4$  in Figure 4) are listed in Table 6.



Gleit- line 1	Kombination (2) 2			Kombination (3) 3		
	1,0 $\sigma'$	0,7 $\sigma'$	0,5 $\sigma'$	1,0 $\sigma'$	0,7 $\sigma'$	0,5 $\sigma'$
+ 25,60	1,57	1,55	1,52	1,54	1,50	1,53
+ 17,60	1,50	1,36	1,28	1,48	1,36	1,30

Table 4: Stability level  $n$  for 2 slip lines with reduced friction angle for clay

1. Slip line                      2. Combination 2                      3. Combination 3

Variante 1	Reibungswinkel $\phi'$ 2	Kohäsion $c'$ 3
0	34,0°	3,0 $\text{Mp/m}^2$
1	34,0°	0,5 $\text{Mp/m}^2$
2	30,6°	0,5 $\text{Mp/m}^2$
3	27,2°	0,1 $\text{Mp/m}^2$
4	17,0°	0,0 $\text{Mp/m}^2$

Table 5: Reduced shear strength for clay (Example 2)

1. Variant                      2. Friction angle  $\phi'$                       3. Cohesion  $c'$

Variante 1	Befrorene Schichtdicke 2	
	5 cm	10 cm
0	2,08	2,68
1	2,09	1,92
2	1,98	1,88
3	1,95	1,81
4	1,88	1,69

BEST AVAILABLE COPY

Table 6: Stability level  $n$  with complete winter fill (for friction circles see Figure 4)

1. Variant                      2. Frozen layer thickness

#### Slip Wedge Method (Block Method)

Since preferred horizontal slip lines may be present, especially in the area of the winter fill zones 1 and 2, further investigations were performed according to the block method (8). The slip lines lying at the height 6.80 and 13.20 bend down with various slopes to the summit points 1 and 3. Under these assumptions, stabilities  $\min \eta \geq 1.3$  resulted e.g. for Variant 4.

#### Conclusions

The calculation of the effect of winter fills of cohesive earth materials in reducing stability is possible with the usual methods for calculating the stability of slopes. The construction of the dam cross sections can here be different. By means of BISHOP's method, which has been programmed for data processing (6), the practically possible variants of shear strength reduction can be well handled. But optimization for slide faces in the form of a circular arc, in accord with (9), offers more effective opportunities for utilization.

The calculations for winter fills which have been explained above provide no generally valid results, but they permit corresponding estimates for similar dam cross sections. Definitive investigations must be performed on the basis of dam geometry, of specific earth materials data pertaining to the effect of frost, and of the planned extent of the winter fill. If the technical and technological construction preparations for winter fills with cohesive earth materials are made in time, this factor will increase the continuity of building implementation and will make possible optimum utilization of the construction machines utilized for dam construction.

#### References

- (1) TGL 21 239 Sheet 3 "Design and Construction of Dams more than 5 m High"
- (2) GROSSMAN, S.: Building in fine-grained earth materials under frost, Lecture on the Eighth International Conference "Mechanization in Earth Construction", Dresden 1973.
- (3) SIEGEL, H.L. Determination of water permeability of locally severely porous zones in earth material fills. WWT, Berlin 24, (1974) No. 9, pp 310 - 312.
- (4) Test report on triaxial comparison tests between frozen and unfrozen packing clay in a dam across a valley. VEB Building Ground Berlin, Technology Division, March 1973 (unpublished).
- (5) SCHEFFLER, H.: Considerations on the determination of shear strength parameters for calculating stability of slopes. Series on "Technology and Economy" of the KDT, No. 33, Colloquium "Stability Demonstration of Slopes", Berlin 1969.
- (6) Work standard EDV-WAPRO 04-02-02-U, Calculation of Stability of Slopes according to BISHOP's Procedure, VEB Water Economy Planning, Halle, September 1972.
- (7) Work standard WAPRO 4.10 Sheet 2 Stability of Slopes, VEB Water Economy Planning, Halle, October 1969.
- (8) Report of results of stability calculations, model dam winter fill. VEB Water Economy Planning, Halle, Dresden Branch, February 1975 (unpublished).
- (9) Work standard EDV-WAPRO 05-45-01, Calculation of Stability of Slopes with arbitrary form of slide face, taking into account pore water pressures. VEB Water Economy Planning, Halle, October 1974.